


0720 Series



Specification	Inlet
Power Rating	2.5A 250V AC
Electric Strength	AC 2,000V for 1 Minute
Contact Resistance	30MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC
Operating Temperature	+70°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Mounting	F : Screw-on P : Snap-in
Terminal	S : Solder Tab (13.5 x 0.3) P : PCB Pin
Polarized Option	A : Polarized B : Non-polarized

Unit : mm

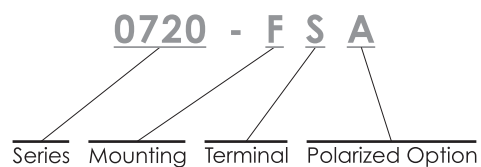