


# 0721-4 Series



▶ Specification	▶ Inlet	
<b>Power Rating</b>	2.5A 250V AC Europe & UL & CSA 7A 125V AC UL	
<b>Electric Strength</b>	AC 2,000V for 1 Minute	
<b>Contact Resistance</b>	30MΩ Max.	
<b>Insulation Resistance</b>	100MΩ Min. at 500V DC	
<b>Operating Temperature</b>	+80°C	
<b>Materials</b>	Thermoplastic UL Flammability 94V-0 & Copper Alloy	
<b>Polarized Option</b>	P : Non-Polarized S : Polarized	
<b>Terminal</b>	S : Solder Tab	
<b>Dimension Option</b>	A : View A/D 1 : View B/E	3 : View C/F

Unit : mm

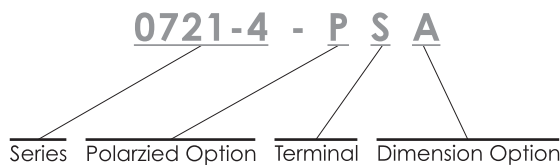