


0721-5 Series



▶ Specification	▶ Inlet
Power Rating	2.5A 250V AC Europe & UL & CSA 7A 125V AC UL
Electric Strength	AC 2,000V for 1 Minute
Contact Resistance	30MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC
Operating Temperature	+90°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Polarized Option	P : Non-Polarized S : Polarized
Terminal	P : PCB Pin
Frame Dimension Option	A : 23 x 18 B : 17.5 x 22.5

Unit : mm

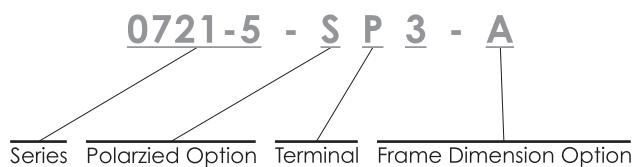