


# 0721-6 Series



| Specification                | Inlet   |
|------------------------------|---|
| <b>Power Rating</b>          | 2.5A 250V AC Europe & UL & CSA<br>7A 125V AC UL       |
| <b>Electric Strength</b>     | AC 2,000V for 1 Minute                                |
| <b>Contact Resistance</b>    | 30MΩ Max.   |
| <b>Insulation Resistance</b> | 100MΩ Min. at 500V DC                                 |
| <b>Operating Temperature</b> | +100°C  |
| <b>Materials</b>             | Thermoplastic UL Flammability<br>94V-0 & Copper Alloy |
| <b>Polarized Option</b>      | P : Non-Polarized<br>S : Polarized                    |
| <b>Terminal</b>              | P : PCB Pin<br>S : Solder Tab (2.5 x 0.8)             |
| <b>Metal Clip</b>            | M : with Metal Clip                                   |

Unit : mm

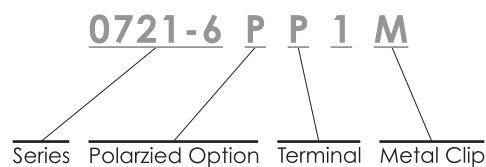