



0721-SBP Series



Specification	Inlet	Rocker Switch
Power Rating	2.5A 250V AC Europe 7A 125V AC North America	3 A 250V AC Europe 6 A 125V AC North America
Electric Strength	AC 2,000V for 1 Minute	AC 1,000V for 1 Minute
Contact Resistance	30MΩ Max.	20MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
Operating Temperature	+80°C	+ 85°C (Europe) + 125°C (North America)
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Terminal	P : PCB Pin	PCB Pin
Polarized Option	P : non-polarized S : polarized	
Mounting Option	A : From above B : From below Panel Thickness : 1.6	1 : Single Pole (On / Off Switch) 2 : Double Pole (On / Off Switch)

Unit : mm

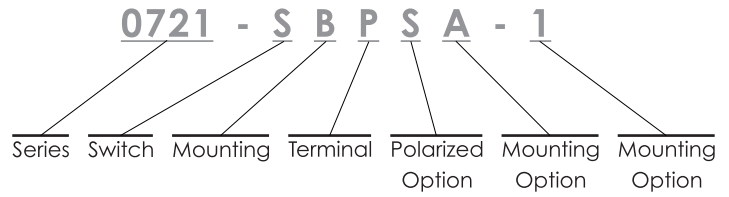