



# 0724-S Series



Specification	Inlet	Rocker Switch
<b>Power Rating</b>	2.5A 250V AC Europe 7A 125V AC North America	10A 250V AC
<b>Electric Strength</b>	AC 2,000V for 1 Minute	AC 1,500V for 1 Minute
<b>Contact Resistance</b>	30MΩ Max.	20MΩ Max.
<b>Insulation Resistance</b>	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
<b>Operating Temperature</b>	+80°C	+ 100°C
<b>Materials</b>	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-2 & Copper Alloy
<b>Mounting</b>	C : Screw-on P : Snap-in	Single Pole (On / Off Switch)
<b>Terminal</b>	Q : Q.D / Solder Tab, 4.8 X 0.8 S : Solder Tab, 3.5 X 0.8	Q.D Tab, 4.8 X 0.8 Solder Tab, 3.5 X 0.8
<b>Panel Thickness</b>	Snap-in Panel Thickness : 0.8 / 1.0 / 1.2	

Unit : mm

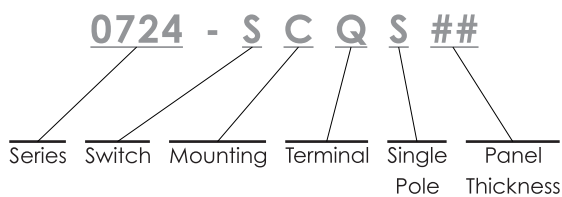