


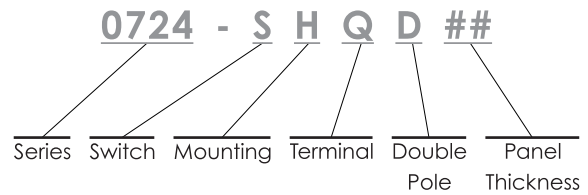
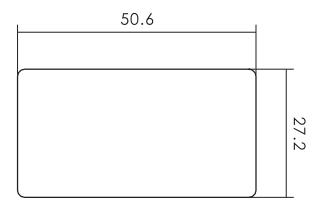


0724-S Series






Specification	Inlet	Rocker Switch
Power Rating	2.5A 250V AC Europe 7A 125V AC North America	6A 250V AC Europe 12A 125V AC North America
Electric Strength	AC 2,000V for 1 Minute	AC 1,500V for 1 Minute
Contact Resistance	30MΩ Max.	20MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
Operating Temperature	+80°C	+ 85°C (Europe) + 125°C (North America)
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Mounting	H : Horizontal Snap-in	Double Pole (On / Off Switch)
Terminal	Q : Q.D / Solder Tab, 4.8 X 0.8 V : Pre-wire Tab	Solder Tab, 4.7 X 0.8
Panel Thickness	Snap-in Panel Thickness : 1.0 / 1.2 / 1.5	

Unit : mm



PANEL CUT-OUT



PANEL CUT-OUT