



0711-1RS Series

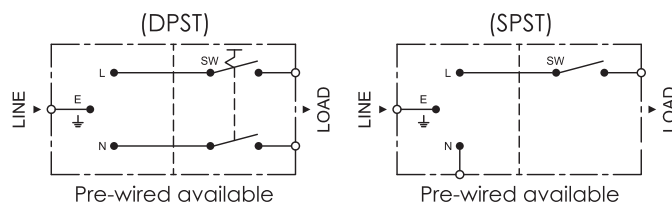

Specification	Inlet	Rocker Switch
Power Rating	10A 250V AC	10A 250V AC
Electric Strength	AC 2,000V for 1 Minute	AC 1,500V for 1 Minute
Contact Resistance	30MΩ Max.	20MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
Operating Temperature	+90°C	+ 100°C (SPST) + 105°C (DPST)
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-2 & Copper Alloy
Terminal	Q : Q.D / Solder Tab, 4.8 X 0.8 S : Solder Tab, 2.5 X 0.8	Q.D / Solder Tab, 4.8 X 0.8 Solder Tab, 3.5 X 0.8
Panel Thickness	Snap-in Panel Thickness : 0.8 / 1.0 / 1.2 / 1.5	Single Pole (On / Off Switch) Double Pole (On /Off Switch)

Unit : mm

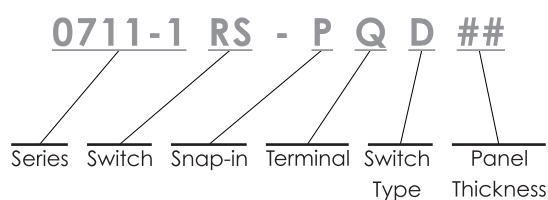