


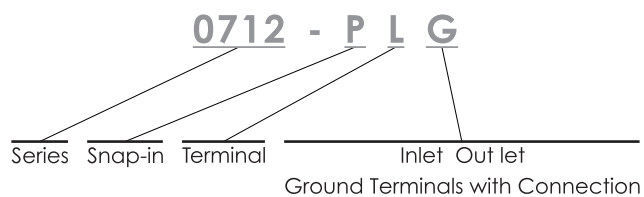
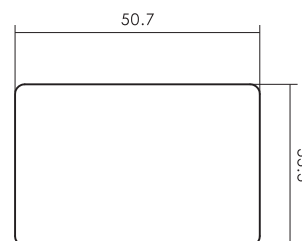


0712-P Series



Specification	Inlet	Outlet
Power Rating	10A 250V AC Europe 15A 125V AC North America	10A 250V AC
Electric Strength	AC 2,000V for 1 Minute	AC 2,000V for 1 Minute
Contact Resistance	30MΩ Max.	30MΩ Max.
Insulation Resistance	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
Operating Temperature	+70°C	- 25°C to + 70°C
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-0 & Copper Alloy
Mounting	Snap-in, Panel Thickness : 0.8 ~ 2.0	
Terminal	L : Solder Tab, 2.8 X 0.8 Q : Q.D / Solder Tab, 4.8 X 0.8	

Unit : mm



PANEL CUT-OUT