



0717 / 0717-1 Series



▶ Specification	▶ Inlet	
Power Rating	10A 250V AC	
Electric Strength	AC 2,000V for 1 Minute	
Contact Resistance	30MΩ Max.	
Insulation Resistance	100MΩ Min. at 500V DC	
Operating Temperature	+90°C	
Materials	Thermoplastic UL Flammability 94V-0 & Copper Alloy	
Mounting	C : Screw-on P : Snap-in	
Terminal	L : Solder Tab, 2.8 X 0.8 Q : Q.D / Solder Tab, 4.8 X 0.8	S : Solder Tab, 2.5 X 0.8 W : Q.D Tab, 6.3 X 0.8
Panel Thickness	Snap-in Panel Thickness : 0.8 ~ 2.0	

Unit : mm

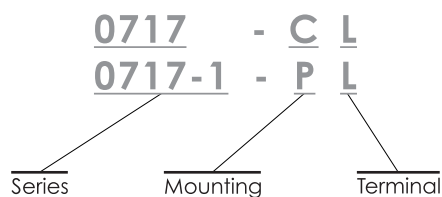