


# 0721 / 0724 Series

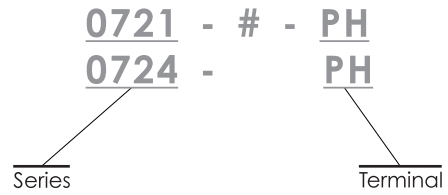

※ Wire type Optional

▶ Specification	▶ C8 Inlet	▶ C6 Inlet
<b>Power Rating</b>	2.5A 250V AC Europe & UL & CSA 7A 125V AC UL	2.5A 250V AC Europe & UL & CSA 7A 125V AC UL
<b>Electric Strength</b>	AC 2,000V for 1 Minute	AC 2,000V for 1 Minute
<b>Contact Resistance</b>	30MΩ Max.	30MΩ Max.
<b>Insulation Resistance</b>	100MΩ Min. at 500V DC	100MΩ Min. at 500V DC
<b>Operating Temperature</b>	+105°C	+105°C
<b>Materials</b>	Thermoplastic UL Flammability 94V-0 & Copper Alloy	Thermoplastic UL Flammability 94V-0 & Copper Alloy
<b>Terminal</b>	PH : Clamps	PH : Clamps

Unit : mm

